


(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFG. CODE USABLE ON CODE	(4) UNIT OF MEAS.	(5) QTY INC IN UNIT	(6) 15-DAY ORGANIZATIONAL MAINTENANCE ALW				(7) ILLUSTRATION	
					(a) 1-5	(b) 6-20	(c) 21-50	(d) 51-100	(a) FIGURE NO.	(b) ITEM NO.
		GROUP 0607—INSTRUMENT PANEL INSTRUMENT PANEL AND RELATED PARTS FIG. 6-7								
PO	5310-045-3299	WASHER, LOCK: split, carb-s cd-pltd, for No. 8 screw size, circuit breaker attaching, (6) for M151, M151A1, M151A1C, and M718; (4) for M151A2, M718A1 and M825; MS35338-42 (96906).	EA	10	*	*	*	*	6-7	1
PO	5310-012-0622	NUT, PLAIN, HEXAGON: carb-s, cd or zn-pltd, No. 8-32NC-2B, circuit breaker attaching, (6) for M151, M151A1, M151A1C, and M718; (4) for M151A2, M718A1 and M825; MS35649-82 (96906).	EA	10	*	*	*	*	6-7	2
PO	6625-321-6365	METER, ARBITRARY SCALE: generator battery indicating, MS24532-2 (96906).	EA	1	*	*	*	*	6-7	3
PO	5975-588-0387	NUT: indicator light, 7358624 (19207)	EA	3	*	*	*	*	6-7	4
PO	5310-168-2935	WASHER: indicator light, 7358625 (19207).	EA	3	*	*	*	*	6-7	5
PO	2540-119-3900	BRACKET: indicator light mounting, 7358623 (19207).	EA	3	*	*	*	*	6-7	6
X20		BODY: indicator light, 2358620 (19207).	EA	3	*	*	*	*	6-7	7
PO	5330-143-7002	GASKET, RUBBER: indicator light, 11605388 (19207).	EA	3	*	*	*	*	6-7	8
PO	6240-266-9940	LAMP, INCANDESCENT: headlight high beam indicator (1); instrument panel lights (2); MS25231-1829 (96906).	EA	3	*	*	*	*	6-7	9
PO	2540-150-7503	PLATE: instrument panel, 8754669-1 (19207).	EA	1	*	*	*	*	6-7	10
PO	5310-550-1130	WASHER, LOCK: flat, internal tooth, carb-s, cd-pltd, for ¼ screw size, instrument panel mounting, MS35333-40 (96906).	EA	4	*	*	*	*	6-7	11
PO	5305-988-1723	SCREW, MACHINE: pan-head, cross-recessed, carb-s, cd-pltd ¼-24UNC-2A X ½ in. lg. instrument panel mounting, MS35206-279 (96906).	EA	4	*	*	*	*	6-7	12
PO	5330-297-6329	PACKING, PREFORMED: high beam indicator lens (1); instrument panel light lens (2), 7358626 (19207).	EA	3	*	*	*	*	6-7	13
PO	5310-559-0070	WASHER, LOCK: flat, internal tooth, carb-s, cd-pltd, for No. 8 screw size, high beam indicator (2) instrument Panel lights (4); MS35333-38 (96906).	EA	2	*	*	*	*	6-7	14
PO	5305-984-6189	SCREW, MACHINE: pan-hd, cross-recessed, carb-s, cd-pltd, No. 8-32UNC-2A X ¼ in. lg, high beam indicator light (2); instrument panel lights (4); MS35206-241 (96906).	EA	6	*	*	*	*	6-7	15
PO	6685-752-7765	INDICATOR, TEMPERATURE, ELECTRICAL RESISTANCE: MS24543-2 (96906).	EA	1	*	*	*	*	6-7	16
PO	6620-938-8212	INDICATOR, PRESSURE: oil, MS24541-2 (96906).	EA	1	*	*	*	*	6-7	17
PO	6620-933-3600	INDICATOR, LIQUID QUANTITY: fuel, MS24544-2 (96906)	EA	1	*	*	*	*	6-7	18
PO	6220-299-5564	LENS: indicator light, 7358622 (19207).	EA	1	*	*	*	*	6-7	19
PO	6220-337-7345	LENS: instrument panel lights, 7358621 (19207).	EA	2	*	*	*	*	6-7	20
PO	5925-026-4767	CIRCUIT BREAKER: 28 volt dc, Type I, Grade A, Class I, 15 amp, (3) for M151, M151A1, M151A1C, and M718; (2) for M151A2, M718A1, and M825; M13516/1-1 (81349).	EA	5	*	*	*	*	6-7	21
PO	5305-984-6195	SCREW, MACHINE: pan-hd, cross-recessed, carb-s, cd-pltd, No. 8-32UNC-2A X ¾ in. lg, circuit breaker attaching, (6) for M151, M151A1, M151A1C and M718; (4) for M151A2, M718A1, and M825; MS35206-247 (96906).	EA	10	*	*	*	*	6-7	22

Current part is item (3) on diagram. Available at www.oshkoshequipment.com

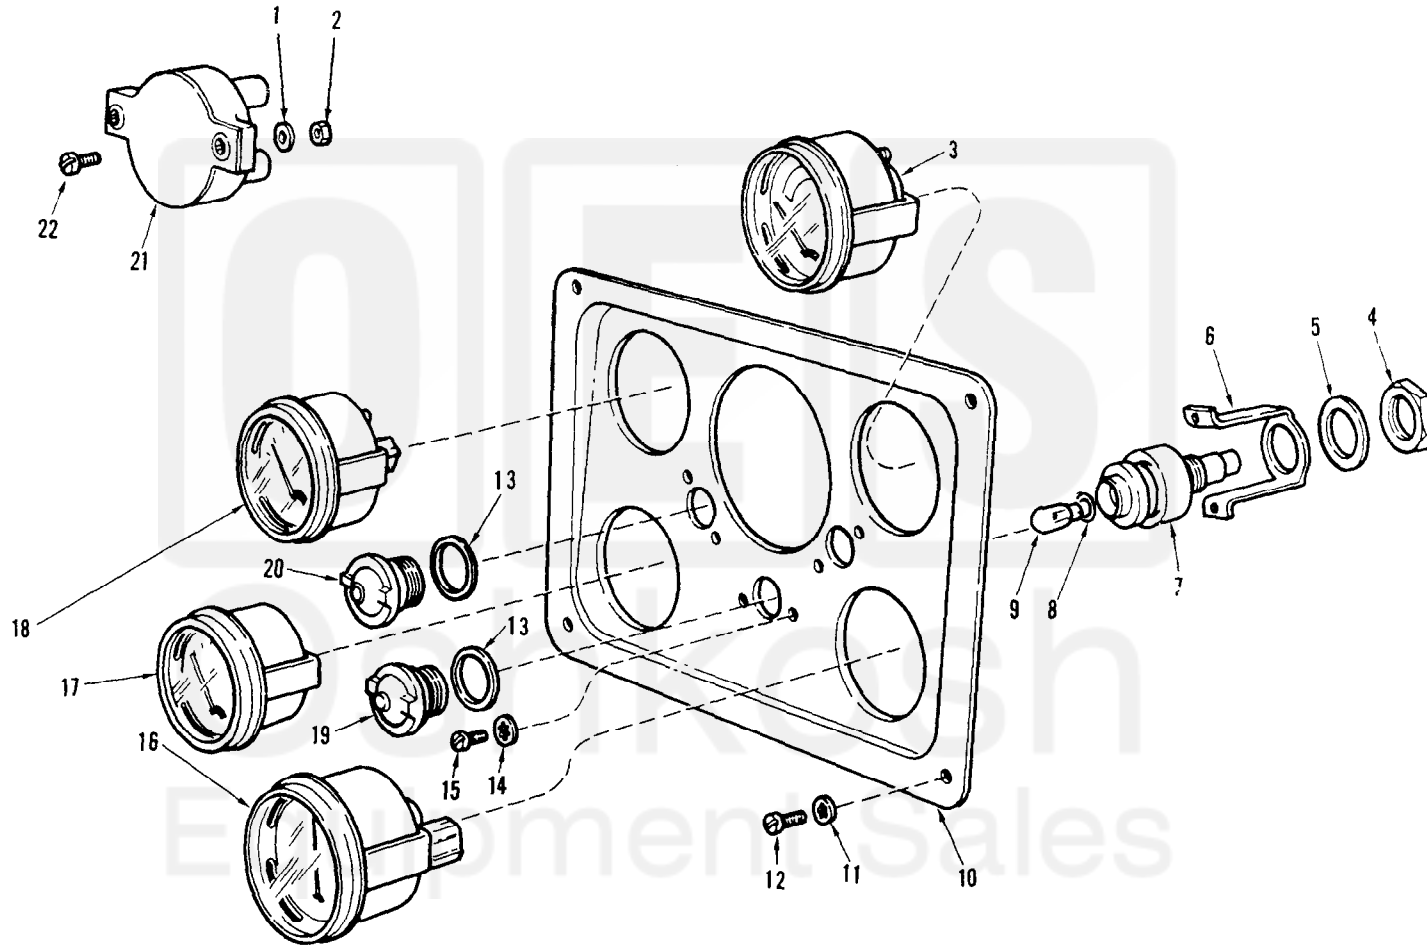

AT 39893

Figure 6-7. Instrument panel and related parts.

Current part is item (3) on diagram. Available at www.oshkoshequipment.com