


(1) ILLUST		(2) SOURCE, MAINT AND RECOVERABILITY CODE				(3) FEDERAL STOCK NO	(4) DESCRIPTION	(5) UNIT OF ISSUE	(6) QTY INC IN UNIT	(7) 15-DAY MAINT ALW PER 100 EQUIP	
(a) FIG NO	(b) ITEM NO	(a) MATERIEL CODE	(b) SOURCE	(c) MAINTENANCE LEVEL	(d) RECOVERABILITY					(a) CO OR BTRY	(b) CO SEP BN SEP OR RECT
32	12		P O R			6685-335-9508	INDICATOR, PRESSURE: oil w/clamp, assy 60 psi (used w/transmitter, 6685-355-9509) (7954230)	ea	1		
			P O			5310-012-0614	NUT, PLAIN, HEXAGON: S, cd- or zn-pltd, no. 10 0, 190-32NF-2B, 3/8 w, 1/8 thk (120614)	ea	2		
			P O			5310-596-7686	WASHER, LOCK: split, med, S, cd- or zn-chromate-fin., no. 10 0, 190 screw size (96906-35338-43)	ea	2		

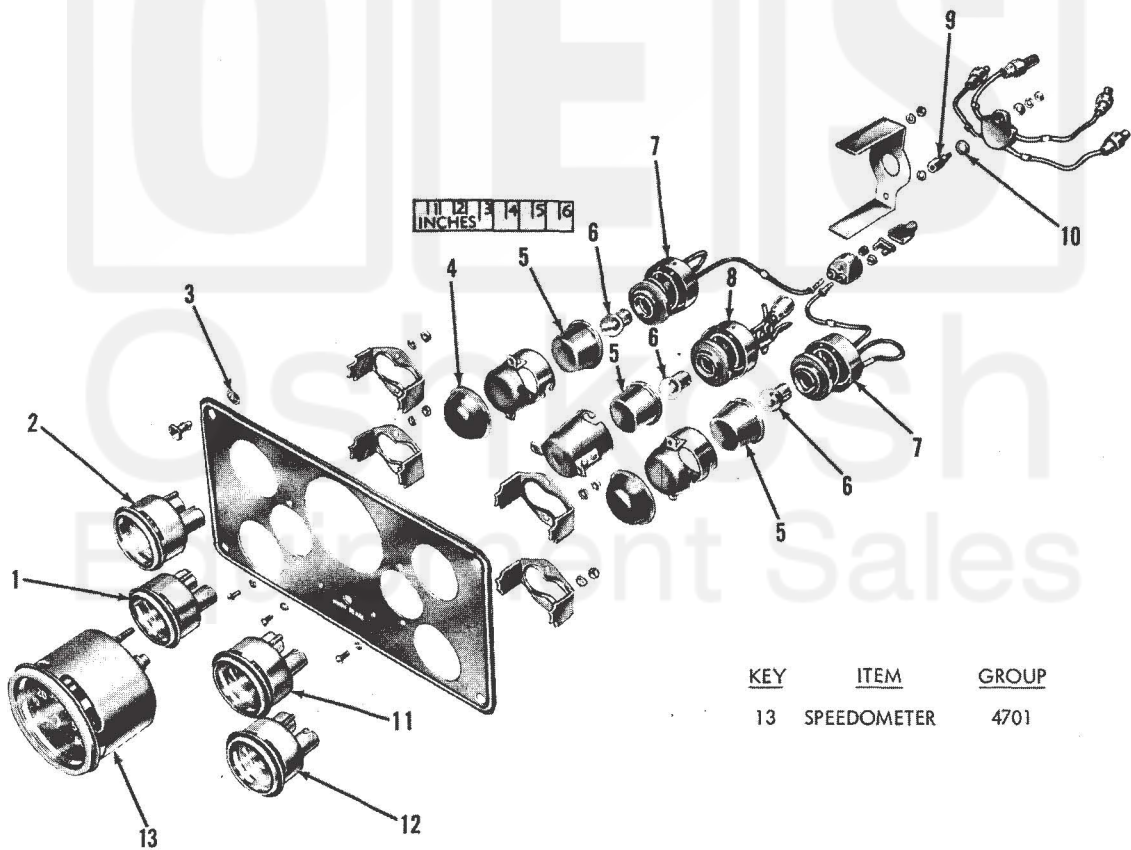

ORD E64876

Figure 32. Instrument panel