

Figure 48. Fan Assembly and Belts

Section II. REPAIR PARTS LIST

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8)
(a) FIG NO	(b) ITEM NO	SMR CODE	NATIONAL STOCK NUMBER	CAGE	PART NUMBER	USABLE ON CODE	UM	QTY INC IN UNIT
						GROUP 0505 FAN ASSEMBLY AND BELTS		
48	1	M0000		45152	2012790-120	HOSE ASSEMBLY, MAKE FROM PART NUMBER FC350-04. CAGE 01276, APPROXIMATELY 120 INCHES LONG.	EA	1
48	2	PAOZZ	4730-00-217-2429	01276	401-4S	.ADAPTER.STRAIGHT	EA	2
48	3	M0000	- - -	45152	2012680-8	HOSE ASSEMBLY, MAKE FROM PART NUMBER FC350-04. CAGE 01276, APPROXIMATELY 8 INCHES LONG.	EA	1
48	4	PAOZZ	4730-00-885-9861	01276	190296-45	.ELBOW.TUBE TO HOSE	EA	1
48	5	PAOZZ	4730-00-217-2429	01276	401-4S	.ADAPTER.STRAIGHT	EA	1
48	6	PFOZZ	4730-00-254-6211	30327	49-F-04X02	ELBOW.PIPE TO TUBE	EA	2
48	7	PAOZZ	4820-01-107-4672	77873	2-22724	VALVE.RELIEF	EA	1
48	8	PAOZZ	5305-00-071-2079	80204	B1821BH050C400N	SCREW.CAP,HEX 1/2-13 X 4	EA	1
48	9	PBFZZ	2930-01-157-2979	72582	8924109	SUPPORT.FAN	EA	1
48	10	PAOZZ	5310-00-820-6653	96906	MS35338-50	WASHER.LOCK 5/8	EA	2
48	11	PAOZZ	5305-01-052-2343	45152	2CH17	SCREW.CAP.HEX 5/8-11 X 5 1/2	EA	2
46	12	PAOZZ	4730-00-995-1559	96906	MS51500A6	ADAPTER.STRAIGHT	EA	2
48	13	M0000		45152	2013400-23	HOSE ASSEMBLY, MAKE FROM PART NUMBER FC350-06. CAGE 01276, APPROXIMATELY 23 INCHES LONG	EA	1
48	14	PAOZZ	4730-00-852-4310	01276	190261-6S	.ELBOW,TUBE TO HOSE	EA	1
48	15	PAOZZ	4730-01-065-7552	01276	411-6S	.ADAPTER.STRAIGHT	EA	1
48	16	PAOZZ	4730-01-238-6442	01276	2023-4-4S	ELBOW.PIPE TO TUBE	EA	1
48	17	M0000		45152	2013430-7	HOSE ASSEMBLY, MAKE FROM PART NUMBER FC350-04. CAGE 01276. APPROXIMATELY 7 INCHES LONG.	EA	1
48	18	PAOZZ	4730-00-203-3550	01276	411-4S	.ADAPTER,STRAIGHT	EA	1
48	19	PAOZZ	4730-00-885-9861	01276	190296-4S	.ELBOW.TUBE TO HOSE	EA	1
48	20	PAOZZ	3030-00-569-9376	96906	MS51066RC48-3	V-BELTS.MATCHED SET (TEMP>-37 DEG F)	EA	1
48	21	PAOZZ	2930-01-337-0035	45454	412073	FAN.SUCTION	EA	1
48	22	PAOZZ	5310-00-584-5272	96906	MS35338-48	WASHER.LOCK 1/2	EA	4
48	23	PAOZZ	5305-01-355-6788	45152	28249AX	SCREW.CAP.HEX 1/2-13 X 2	EA	4
48	24	PAOZZ	4730-00-187-0840	88044	AN816-4	ADAPTER.STRAIGHT	EA	1
48	25	PFOZZ	5365-01-157-0971	45152	65912BX	SPACER.SPECIAL	EA	1
45	26	PAOZZ	5306-01-155-9765	45152	115304A	BOLT.MACHINE 1/2-13 X 1 1/4	EA	2
49	27	PFOZZ	4730-00-900-3296	30327	48F1-8 1-4	ADAPTER.STRAIGHT	EA	1

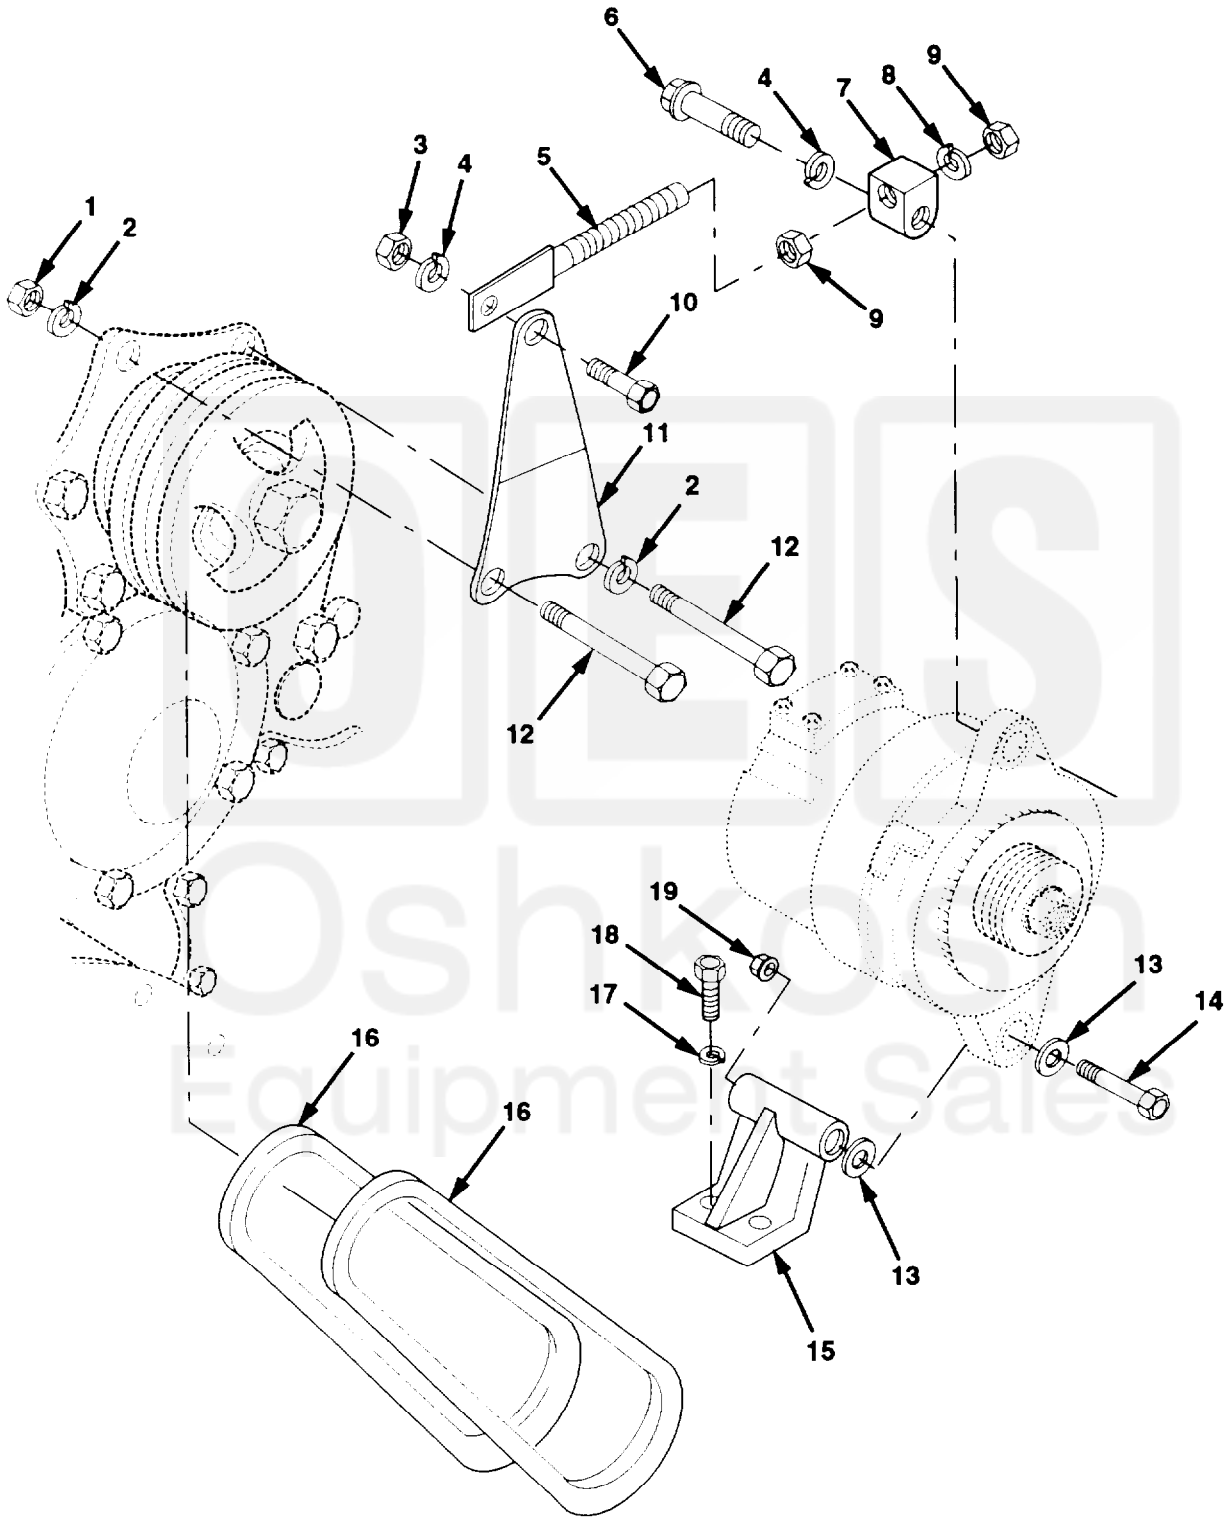


Figure 51. 12V Alternator Mounting

Section II. REPAIR PARTS LIST

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO	(b) ITEM NO	SMR CODE	NATIONAL STOCK NUMBER	CAGE	PART NUMBER	DESCRIPTION USABLE ON CODE	UM	INC IN UNIT
						GROUP 0601 12V ALTERNATOR MOUNTING		
51	1	PAOZZ	5310-00-732-0559	96906	MS51968-8	NUT.HEX 3/8-24	EA	1
51	2	PAOZZ	5310-00-637-9541	96906	MS35338-46	WASHER.LOCK 3/8	EA	2
51	3	PAOZZ	5310-00-768-0318	96906	MS51967-14	NUT.HEX 1/2-13	EA	1
51	4	PAOZZ	5310-00-584-5272	96906	MS35338-48	WASHER.LOCK 1/2	EA	2
51	5	PBOZZ	2920-01-337-2102	45152	1867810W	ARM.ALT TENSIONING	EA	1
51	6	PAOZZ	5305-00-071-2072	80204	B1821BH050C225N	SCREW.CAP.HEX 1/2-13 X 2 1/4	EA	1
51	7	PAOZZ	5340-01-336-7002	45152	1867830	EYE.ROD END	EA	1
51	8	PAOZZ	5310-00-584-7888	96906	MS35338-51	WASHER.LOCK 3/4	EA	1
51	9	PAOZZ	5310-00-763-8921	96906	MS51967-23	NUT,HEX 3/4-10	EA	2
51	10	PAOZZ	5305-00-071-2070	80204	B1821BH050C175N	SCREW.CAP.HEX 1/2-13 X 1 3/4	EA	1
51	11	PBOZZ	5340-01-336-6979	45152	1871930	BRACKET.MOUNTING	EA	1
51	12	PAOZZ	5305-01-338-0429	45152	3223HX1	CAPSCREW 3/8-24 X 5 1/2	EA	2
51	13	PAOZZ	5310-00-809-5997	96906	MS27183-17	WASHER.FLAT 1/2	EA	2
51	14	PAOZZ	5305-01-032-2312	80204	B1821BH050C600N	SCREW.CAP.HEX 1/2-13 X 6	EA	1
51	15	PAOZZ	2990-01-252-6239	72582	5148833	BRACKET.ALTERNATOR	EA	1
51	16	PAOZZ	3030-01-387-5679	24161	8136-3525	V-BELTS.MATCHED (TEMP > -37 DEG F)	EA	1
51	17	PAOZZ	5310-00-209-0965	96906	MS35338-47	WASHER.LOCK 7/16	EA	2
51	18	PAOZZ	5305-00-071-2055	80204	B1821BH044C150N	SCREW.CAP.HEX 7/16-14 X 1 1/2	EA	2
51	19	PAOZZ	5310-01-342-8595	45152	1598030	NUT.SELF-LOCKING 1/2-13	EA	1

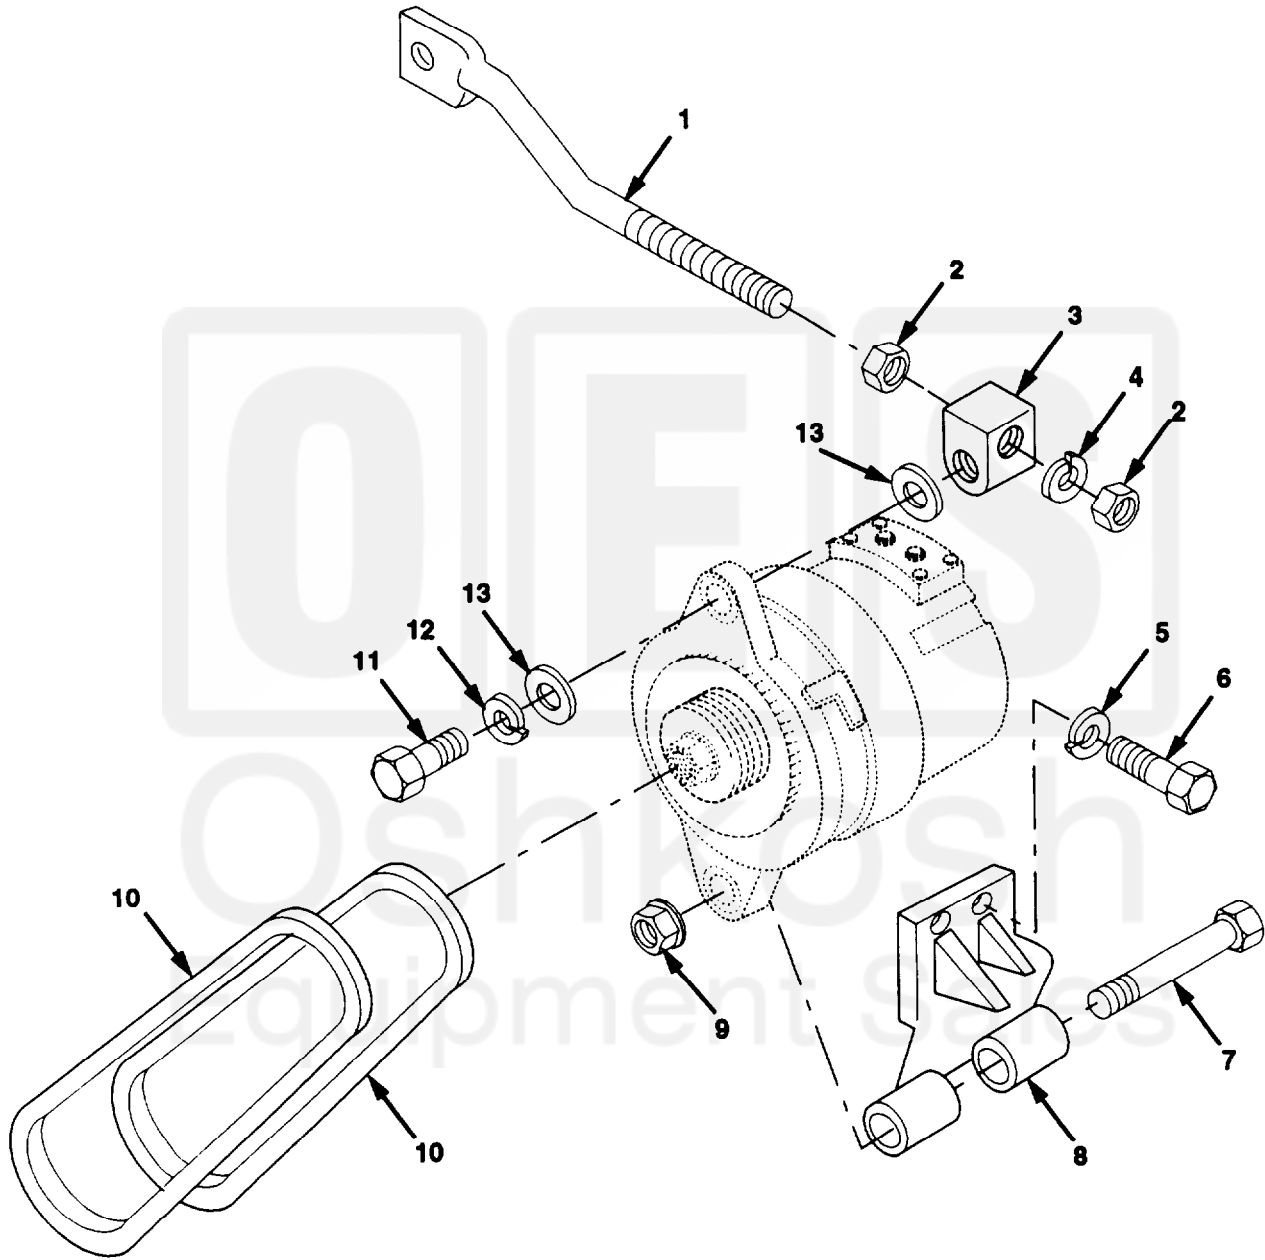


Figure 53. 24V Alternator Mounting

Current part is item (20,16,10) on diagram. Available at www.oshkoshequipment.com

Section II. REPAIR PARTS LIST

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	CAGE	PART NUMBER	DESCRIPTION USABLE ON CODE	UM	QTY INC IN UNIT
						GROUP 0601 24V ALTERNATOR MOUNTING		
53	1	PBOZZ	5340-01-336-7841	45152	1871610	BAR, ALTERNATOR ADJ	EA	1
53	2	PAOZZ	5310-00-763-8921	96906	MS51967-23	NUT, HEX 3/4-10	EA	2
53	3	PAOZZ	5340-01-336-7001	45152	1853160	CONNECTOR, ROD END	EA	1
53	4	PAOZZ	5310-00-584-7888	96906	MS35338-51	WASHER, LOCK 3/4	EA	1
53	5	PAOZZ	5310-00-209-0965	96906	MS35338-47	WASHER, LOCK 7/16	EA	4
53	6	PAOZZ	5305-00-071-2055	80204	B18216H044C150N	SCREW, CAP, HEX 7/16-14 X 1/2	EA	4
53	7	PAOZZ	5305-01-032-2312	80204	B1821BH050C600N	SCREW, CAP, HEX 1/2-13 X 6	EA	1
53	8	PBOZZ	5340-01-336-6032	45152	1800990	BRACKET, ALTERNATOR	EA	1
53	9	PAOZZ	5310-01-342-8595	45152	1598030	NUT, SELF-LOCKING 1/2-13	EA	1
53	10	PAOZZ	3030-01-387-5760	24161	8136-3655	VEE-BELT SET (TEMP > -37 DEG F)	EA	1
53	11	PAOZZ	5305-01-288-1286	45152	25906AX	SCREW, CAP, HEX 1/2-20 X 1 1/2	EA	1
53	12	PAOZZ	5310-00-584-5272	96906	MS35338-48	WASHER, LOCK 1/2	EA	1
53	13	PAOZZ	5310-00-809-5997	96906	MS27183-17	WASHER, FLAT 1/2	EA	2

Current part is item (20,16,10) on diagram. Available at www.oshkoshequipment.com